

# 1013 Poly cover Lock Assembly

## Replacement Instructions

### STEP 1: Remove lock bracket

Remove lock bolt and washer using a 10 mm wrench.



### STEP 2: Remove lock assembly



The lock is removed from the top. Lift the lock up and slide it towards the passenger side of the lock opening to remove. The lock may need to be partially open and turned at a right angle for clearance when removing lock.



### STEP 3: Insert replacement lock

With handle in the open position, insert replacement lock into opening. Push down on all sides to seat properly.

Install lock bracket. Properly fit bracket into groove on rail. Place spacer on bolt between lock and lock bracket. Thread bolt with washer into lock assembly (see picture for proper placement).

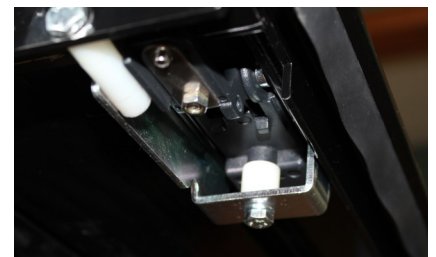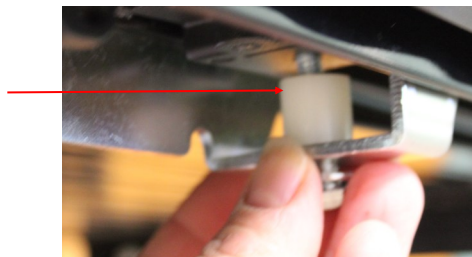

**DO NOT OVERTIGHTEN.** Turn approximately 1/4 turn past full lock washer compression.